

Product Code:

LPT1032W605-TA-03-3.4-12-R



Picture:



Specification:


Rated Voltage	(Vp-p)	3
Max Input Voltage	(Vp-p)	25
*Rated Current	(mA)	≤3
Capacitance at 100Hz	(pF)	12000±30%
*Sound Output at 10cm	(dB)	≥75
Resonance Frequency	(KHz)	3.4±0.5
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	0.3
Housing Material		ABS
RoHS		Yes

*Value applying at rated voltage , 3.4KHz, 1/2 duty , square wave

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Contact us Tel:+86 186 8042 0598 info@piezoelements.com www.piezoelements.com

Frequency Response:

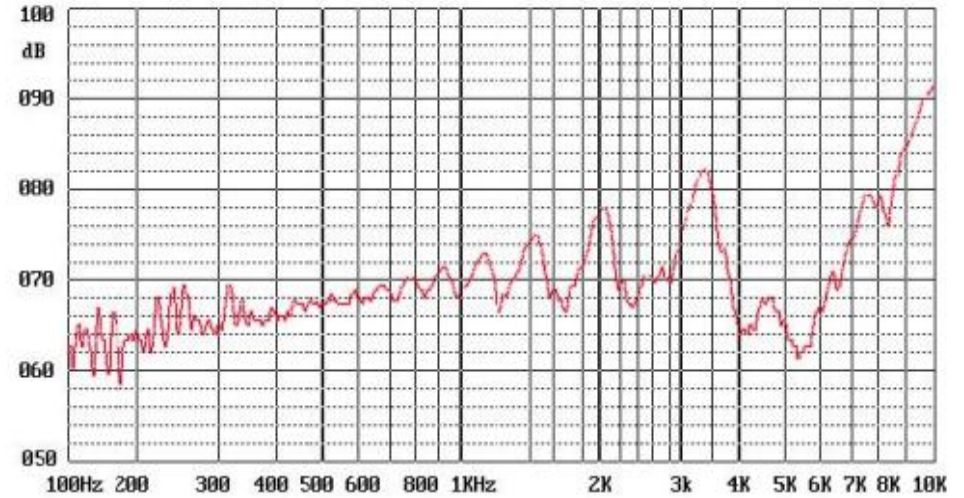

Dimensions (Unit: mm)

Tolerance: ±0.5mm Except Specified

